



JIFTEX POLYMER

WATER BASED EMULSION POLYMERS & ADHESIVES

Since 2003



Paints & Coating Industry

Ref	Type	PH	Viscosity (Poise)	Solids ±1%	MFFT ±1 °C	Recommended For
Copolymer Emulsions:						
JIFTEX J2250 M	VAM/VV10	4 – 6	10 – 40	50	14	Vam Veova Binder with Very Good Wet Scrub and Alkaline Resistance for Interior /Exterior Paints.
JIFTEX J2255 M	VAM/VV10	4 – 6	10 – 40	55	13	High Solid Vam Veova Binder with very good Wet Scrub and Excellent Alkaline Resistance for Interior / Exterior Paints.
JIFTEX ZX765	VAM/AC	4 – 6	10 – 40	49	14	Indoor Gloss/Matt Paints, Masonry Paints, Plasters etc.
JIFTEX ZX786	VAM/AC	4 – 6	20 – 50	54	10	High solid binder for Indoor Gloss/ Matt Paints, Masonry Paints, Plasters etc.
JIFTEX ZX758	VAM/AC	4 – 6	20 – 50	58	12	High solid binder for Indoor Gloss/ Matt Paints, Masonry Paints, and Plasters with Excellent Wet scrub resistance.
Ter-polymer Emulsions:						
JIFTEX J3352 M	VAM/VV/AC	4 – 6	10 – 40	52	8	Ter Polymer with Good Wet Scrub and Exterior Durability.
JIFTEX J3355	VAM/VV/AC	4 – 6	10 – 50	55	14	High Solid Ter-Polymer with Good Wet Scrub and Exterior Durability.
Styrene Acrylic Emulsions:						
JIFTEX J456	ST/AC	7.5 – 9.0	01 – 5.0	50	16	Interior /Exterior Paints and Textured finishes with very good Wet Scrub resistance.
JIFTEX J456 M	ST/AC	7.5 – 9.0	02 – 8.0	50	18	Interior /Exterior Paints and Textured finishes with very good Wet Scrub Resistance.
JIFTEX J458	ST/AC	7.5 – 9.0	40 – 90	50	16	Interior /Exterior Paints and Textured finishes.
JIFTEX J450	ST/AC	7.5 – 9.0	20 – 60	49	18	Interior / Exterior Paints and Textured finishes with very good gloss & wet scrub resistance.
JIFTEX J452	ST/AC	7.5 – 9.0	60 – 120	50	18	High viscosity binder for Interior / Exterior Paints and Textured finishes with very good gloss & Excellent wet scrub resistance.
JIFTEX J455	ST/AC	7.5 – 9.0	15 – 40	50	20	Interior / Exterior Paints and Textured finishes / Water Proof and Roof coatings. Excellent pigment loading characteristics.
Pure Acrylic Emulsions:						
JIFTEX J501	AC	7.5 – 9.0	0.5 – 5	50	16	Binder for Premium Quality Interior / Exterior Paints with excellent wet adhesion.
JIFTEX J518	AC	7.5 – 9.0	20 – 50	50	12	High viscosity Binder for Premium Quality Interior / Exterior Paints with good wet adhesion.

Adhesive Industry

Ref	Type	PH	Viscosity (Poise)	Solids $\pm 1\%$	MFFT $\pm 1^\circ\text{C}$	Recommended For
Homopolymer Emulsions:						
JIFTEX J1045	PVA	4 – 6	100 – 200	45	13	Adhesive for Wood, Construction Binders, Plasters, General Adhesive etc.
JIFTEX J1050	PVA	4 – 6	350 – 800	50	15	Adhesive for Wood, Construction Binders, Plasters, General Adhesive etc.
JIFTEX J1050 HV	PVA	4 – 6	800 – 1200	50	15	High Viscosity Adhesive for Wood, Construction Binders, Plasters, General Adhesive etc.
JIFTEX J1060	PVA	4 – 6	200 – 400	60	15	High Solid content Adhesive for Wood working, Packaging and General Purpose applications.

Packaging Industry

Ref	Type	PH	Viscosity (Poise)	Solids $\pm 1\%$	Recommended For
JIFTEX PC0045	PVA Based	6 - 8	5 - 15	45	PVA Based Adhesive for Paper-Tube, Paper-Can & Paper to Paper bonding / application.
JIFTEX PC0033	PVA Based	7 - 8	10 - 30	31	PVA Based Adhesive for Paper-Tube, Paper-Can & Paper to Paper bonding / application.
JIFTEX BPG0022	PVA Based	4 - 6	1500 - 2000	25	Bonding Agent for Paper Bag, Paper to Can and also can be used as wood adhesives.
JIFTEX BPG0034	PVA Based	4 - 6	1000 - 1500	34	Bonding Agent for Paper Bag, Paper to Can and also can be used as wood adhesives.
JIFTEX J1117	AC	8.0 – 9.0	0.5 – 2	55	Adhesive for the manufacture of BOPP Tapes.

Carpet Industry

Ref	Type	PH	Viscosity (Poise)	Solids $\pm 1\%$	MFFT $\pm 1^\circ\text{C}$	Recommended For
Carpet Latex:						
JIFTEX CL0055	PVA	4 – 6	5 – 25	55	20	Latex for back coating for woven carpets, textile impregnation & binding.
JIFTEX J2020	Acrylic	7 – 8.5	1 – 8	51	10	Latex for Carpet Backing & textile impregnation.
ANS Latex	Modified PVA	4 – 6	1 – 10	49	18	Latex for Carpet Backing, Textile Impregnation. & Construction Binder.

Construction Industry

Ref	Type	PH	Viscosity (Poise)	Solids $\pm 1\%$	MFFT $\pm 1^\circ\text{C}$	Recommended For
Styrene Acrylic Emulsions:						
JIFTEX J457	ST/AC	6.5 – 7.5	10 – 40	57	0	Binder for Cementitious Flexible Water Proof and Roof coatings, bonding agent, etc.
JIFTEX J488	ST/AC	8.5 – 9.5	0.5 – 2	47	15	Binder for Cementitious coatings, modification of cement mortar, etc. to increase the flexibility and compressive strength.

PVA: Polyvinyl Acetate

VAM/VV: Vam Veova

VAM/VV/AC: Vam Veova Acrylic

ST/AC: Styrene Acrylic

AC: Acrylic


Packing



Quality



Main Customers & Partners

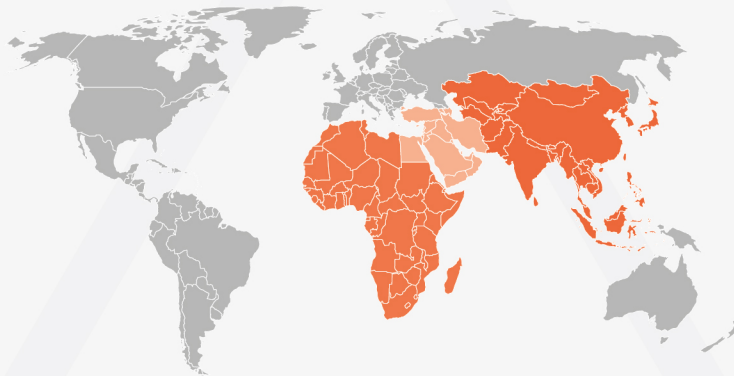


JIFTEX

we are your warranty

Contact us

MODON Jeddah1-st Industrial City | Phase4#
| Street70# | P.O Box: 31388 | Jeddah 22427 |
Kingdom of Saudi Arabia

Tel. #: +966 12 637 3073 / 637 3093
Fax#: +966 12 637 1747
E-mail: jiftexpolymer@asiig.com
Website: jiftexpolymers.com



Website QR Code